
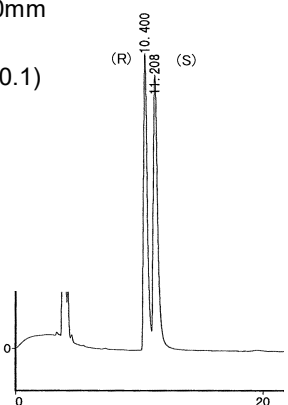


F-02	Styrene oxide	
		
<p><b>OA-2500I</b> <span style="float: right;"><math>\alpha=1.12</math></span></p> <p>Column : 4.6mm i.d.×250mm            Mobile phase:            hexane/2-propanol (100/0.1)            Flow rate : 1mL/min            Detector : UV 230nm            Injection : 1µL (1mg/mL)</p> 	<p><b>OA-7600</b> <span style="float: right;"><math>\alpha=1.16</math></span></p> <p>Column : 4.6mm i.d.×250mm            Mobile phase:            methanol/0.1% triethylammonium            acetate buffer (pH 4.0) (50/50)            Flow rate : 0.5mL/min            Detector : UV 230nm            Injection : 5µL (1mg/mL)</p> 